
Deep Recessed Adjustable Spotlight KV-SP-102

SPECIFICATION

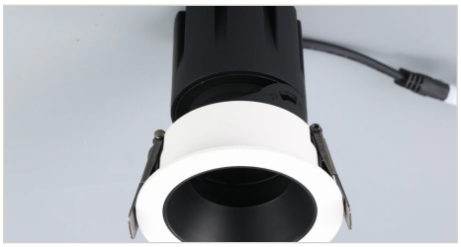

Series	KV-SP-102
Power	7 W / 10 W / 12 W / 15 W / 25 W
Luminous flux	650 / 950 / 1050 / 1450 / 2350 lm
Cut out	Ø55 / Ø75 / Ø95 mm
Beam angle	15° / 24° / 36°, wide option
Colour rendering	Ra >= 90
Colour temperature	2700K - 5000K
Control	Non-dimming standard; Triac, 0-10V, DALI and Bluetooth (BLE) dimming available
Driver	Driver brand named on your proforma invoice
On-site settings	Power and colour temperature switch (3 settings) available; steps confirmed on your quotation
Warranty	5 years

ORDERING GUIDE

KV code	Wattage	Lumens	Beam angles	Size / cut-out	Finish
KV-SP-102-7	7 W	650 lm	15° / 24° / 36°, wide option	Ø65 × 90 mm · cut-out Ø55 mm	On request
KV-SP-102-10	10 W	950 lm	15° / 24° / 36°, wide option	Ø85 × 92 mm · cut-out Ø75 mm	On request
KV-SP-102-12	12 W	1050 lm	15° / 24° / 36°, wide option	Ø85 × 102 mm · cut-out Ø75 mm	On request
KV-SP-102-15	15 W	1450 lm	15° / 24° / 36°, wide option	Ø105 × 115 mm · cut-out Ø95 mm	On request
KV-SP-102-25	25 W	2350 lm	15° / 24° / 36°, wide option	Ø105 × 125 mm · cut-out Ø95 mm	On request